

營業項目:

立・臥空氣儲槽



精密過濾器外殼

各式鐵製品加工

油氣桶、空氣分配器



潛伏焊機龍門座：
升高行程上下7米，橫樑左右行走7米
滾輪架承重30噸。

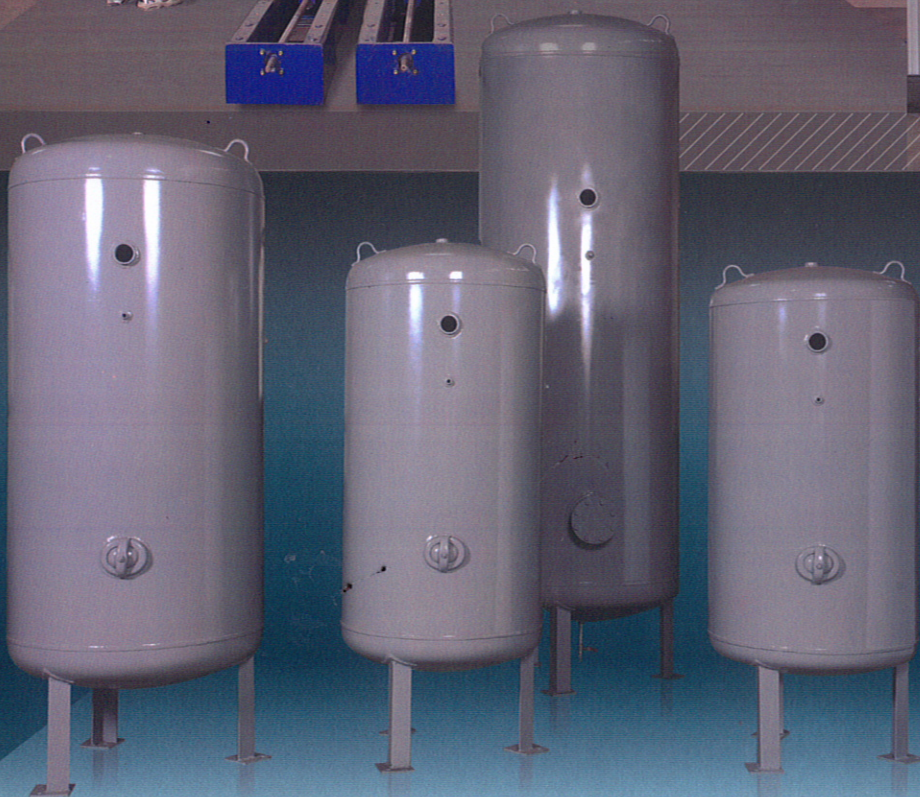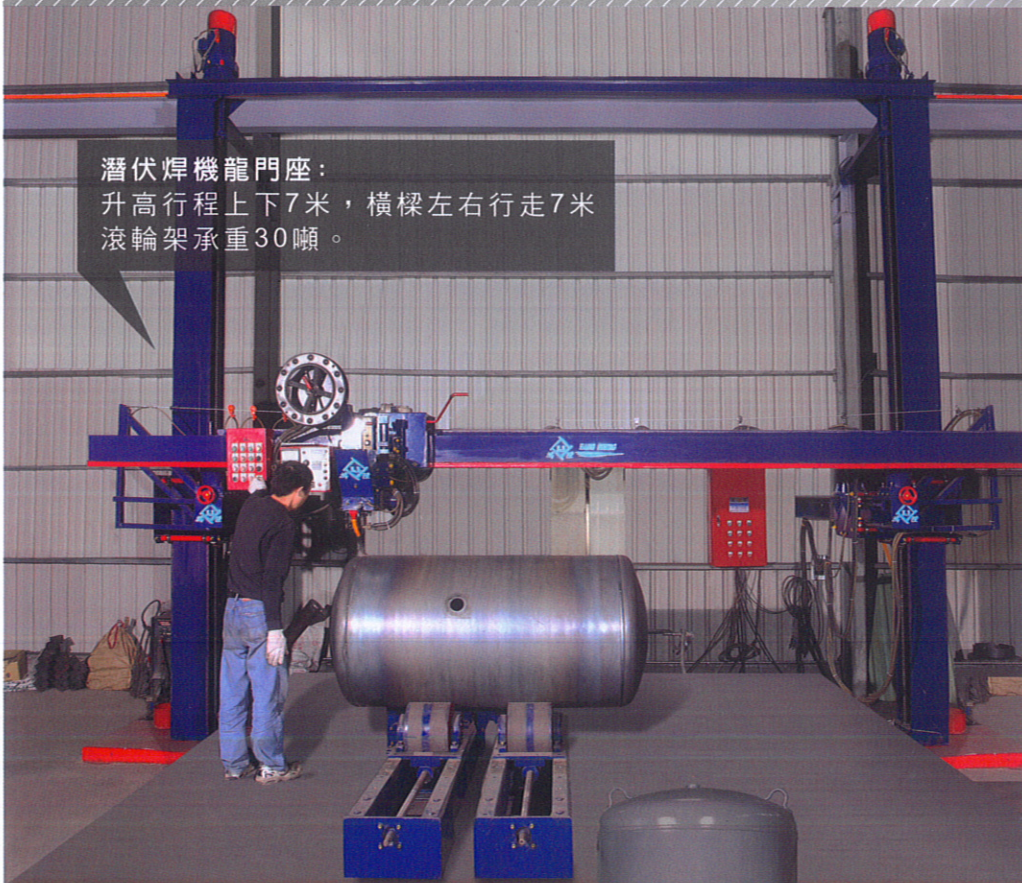

儲槽規格

Volume	OD	L	K	N	M	B	I	O	T	S	P	H
容量	直徑	總高	安全閥高度	入口離地高度	出口離地高度	桶底離地高度	入口	出口	安全閥	洩水孔	壓力錶孔	腳底板孔
70	318	1250	65	625	1075	200	1/2"PT	1/2"PT	1/2"PT	1/2"PT	1/4"PT	Φ14
105	356	1335	65	625	1155	200	1/2"PT	1/2"PT	1/2"PT	1/2"PT	1/4"PT	Φ14
155	388	1610	65	675	1395	200	1/2"PT	1/2"PT	1/2"PT	1/2"PT	1/4"PT	Φ14
200	490	1345	65	660	1130	200	1"PT	1"PT	1/2"PT	1/2"PT	1/4"PT	Φ14
250	490	1645	180	715	1280	200	1-1/2"PT	1-1/2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
304	490	1950	180	1025	1585	200	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
360	580	1790	180	830	1500	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
430	580	2100	180	830	1705	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
580	720	1840	180	860	1530	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
660	760	1850	180	860	1530	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
700	720	2150	180	860	1735	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ14
1000	866	2230	180	1100	1775	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ16
1260	975	2270	180	1120	1795	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ16
1500	975	2540	180	1120	2070	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ16
2000	975	3200	180	1120	2040	300	2"PT	2"PT	1-1/4"PT	1/2"PT	1/4"PT	Φ16
2280	1160	2670	200	1000	2000	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
2500	1160	2820	200	1000	2000	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
3000	1160	3260	200	1000	2000	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
4000	1400	3350	200	1050	2030	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
5000	1500	3400	200	1050	2350	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
6000	1500	4000	200	1050	2350	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
7000	1800	4620	200	1500	2300	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
8000	1800	5250	200	1500	2300	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18
10000	1940	4200	200	1520	2450	300	3"JIS	3"JIS	1-1/2"PT	3/4"PT	3/8"PT	Φ18

此表為碳鋼規格尺寸，皆可依客戶需求修改
 材質：碳鋼、不銹鋼
 歡迎來電洽詢 接受客製化訂購

依CNS標準規範製作
 附二壓容器構造檢查合格證明
 面漆為蝴蝶牌油漆1-38鼠灰色
 2000L以上含內部防鏽處理
 特殊油漆處理 歡迎來電洽詢

依勞檢規範：直徑Φ500~1000需作清掃孔
 直徑Φ1000以上需作人孔

